# E-tech P 144 three phase



## Floor standing, heat only electric boiler.



- Prepare for a carbon free future with electric
- Quick installation with no flues required
- Close load matching with four power stages controlled by stage delay timer
- > Robust stove enamelled casing
- Easy to use controls interface plug and play setup with pre-wired integrated control circuits
- **>** Low maintenance
- Long life high grade incoloy 800 stainless steel heating element
- An economical alternative to LPG and oil for off-grid locations
- Ideal to be used as a temporary heat source or mobile heating
- Suitable to connect to external storage cylinders to produce DHW

### **ACV UK Ltd**

St. David's Drive, St. David's Business Park, Dalgety Bay, Fife, KY11 9PF uk.sales@acv.com | acv.com

# **Technical data and dimensions**




Name	UNIT	E-Tech P 144 three phase
Dimensions A	mm	1495
Dimensions B	mm	567
Dimensions C	mm	550
Dimensions D	mm	183
Dimensions E	mm	542
Dimensions F	mm	125

# A

### **Technical data**

Name	UNIT	E-Tech P 144 three phase
Part number		00624401
Connection - heating	Ø"	2 F
Weight (empty)	kg	131
Max operating temperature	°C	90
Max service pressure heating (primary)	bar	4
Voltage	V	3x400
Capacity (total)	L	60
Electrical power (min/max)	kW	36.0 / 144.0
Number of heating elements		5
Heating element type		4 x 3 x 2.4 kW

Clearances	UNIT	(minimum)
Front	mm	500
Right side	mm	500

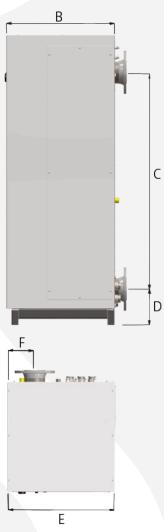

All dimensions in mm.